


SCHEDA PORTATA-CARICO

GEA C€

GEA Lastre in fibrocemento Rette e Curve

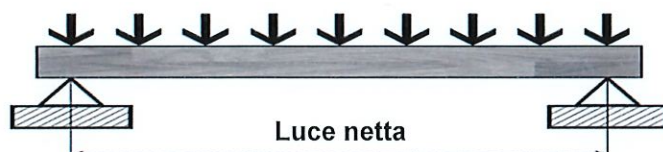

Luce netta M	Carico di Rottura		Carico Ammissibile		
	Totale Distribuito daN	Unitario Distribuito daN/M ²	Coefficiente di sicurezza 1,5 daN/M ²	Coefficiente di sicurezza 2,0 daN/M ²	Coefficiente di sicurezza 2,5 daN/M ²
0.50	1683	3366	2244	1683	1346
0.60	1403	2338	1559	1169	935
0.70	1202	1717	1145	859	687
0.80	1052	1315	877	658	526
0.90	935	1039	693	520	416
1.00	842	842	561	421	337
1.10	765	695	463	348	278
1.20	701	584	389	292	234
1.30	647	498	332	249	199
1.40	601	424	286	215	172
1.50	561	374	249	187	150
1.60	526	329	219	165	132
1.70	495	291	194	142	116
1.80	468	260	173	130	104
1.90	443	233	155	117	93
2.00	421	211	141	106	84
2.10	401	191	127	96	76
2.20	383	174	116	87	70
2.30	366	159	106	80	64
2.40	351	146	97	73	58
2.50	337	135	90	68	54
2.60	324	125	83	63	50

Bagnolo in Piano, 13/11/2023

 Fibrotubi Srl
 Il Presidente
 Ing. Giacomo Capiluppi

